


Default specification for protective barrier

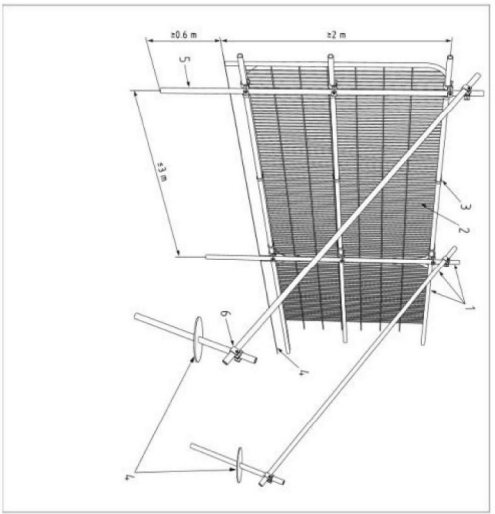

- Key
- 1 Standard scaffold poles
 - 2 Heavy gauge 2m tall galvanized tube and welded mesh infill panels
 - 3 Panels secured to uprights and cross-members with wire ties
 - 4 Ground level
 - 5 Uprights driven into the ground until secure (minimum depth 0.6m)
 - 6 Standard scaffold clamps

Tree Protection fencing to BS 5837

CEZ = Construction Exclusion Zone



Tree Condition categories

- Red circle: Tree for removal due to poor condition/air management
- Orange circle: Tree for removal due to conflict with site layout
- Yellow circle: Tree for retention- Category A High quality and value
- Light green circle: Tree for retention- Category B Moderate quality and value
- Blue circle: Tree for retention- Category C Low quality and value
- Grey circle: Tree for retention- Category C Low quality and value
- Red dashed circle: Retention protection areas shown thus to BS 5837
- Red solid circle: Retention protection areas shown thus to BS 5837
- Red dashed line: Tree Protection fencing to BS 5837

client J LITTLETON LTD
 project 121 TUNSTALL ROAD
 date KNIPERSLEY
 NOVEMBER 2019
 dwg no 1404-T01

FFC Landscape Architects
 landscape and garden design consultants
 7 St Phillips Grove, Southill B93 8FE
 32 Stoke Business Centre, Horley, ST1 4PZ
 Tel: 01782 791506/07960772307
 Email: fflandscapearchitects@gmail.com

FFC Landscape Architects
 landscape and Garden Design Consultants